


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
1K	2		F	ECR-13-006545	19APR2013	LD	JS

FINISHED CABLE DATA		
CONDUCTORS	WIRE AWG	23 AWG Solid
	Ø RANGE in mm	0,546<=Ø<0,610
	MATERIAL	COPPER
	PLATING	BARE
	ELONGATION	15% PER EN 50288-1
INSULATION	MATERIAL	POLYETHYLENE
	OVERALL DIAMETER	1,35
DRAIN WIRE	Ø RANGE in mm	0,40 <= Ø < 0,55
	MATERIAL	COPPER
	PLATING	TINNED
	ELONGATION	15% PER EN 50288-1
BINDER	POLYESTER TAPE	OPTIONAL
INDIVIDUAL PAIR SCREEN	MATERIAL	PLASTIC LAMINATED ALUMINUM FOIL
OVERALL SHIELD	FOIL MATERIAL	PLASTIC LAMINATED ALUMINUM FOIL
OVERALL SHIELD	BRAID MATERIAL	-
	PLATING	-
	COVERAGE	-
	ELONGATION	-
JACKET	MATERIAL	LSZH
	OVERALL DIAMETER (D)	7,4 mm
PULLING FORCE	MAX.	100 N

1. REFER TO PRODUCT SPEC 108-93018 FOR ADDITIONAL REQUIREMENTS.
2. BASENR SPECIFIC PRINT LEGEND INFO:
CAT7 F/FTP XG SOLID PRO4 AWG23 LSZH
3. CABLE COLORED TYPES UPON REQUEST.

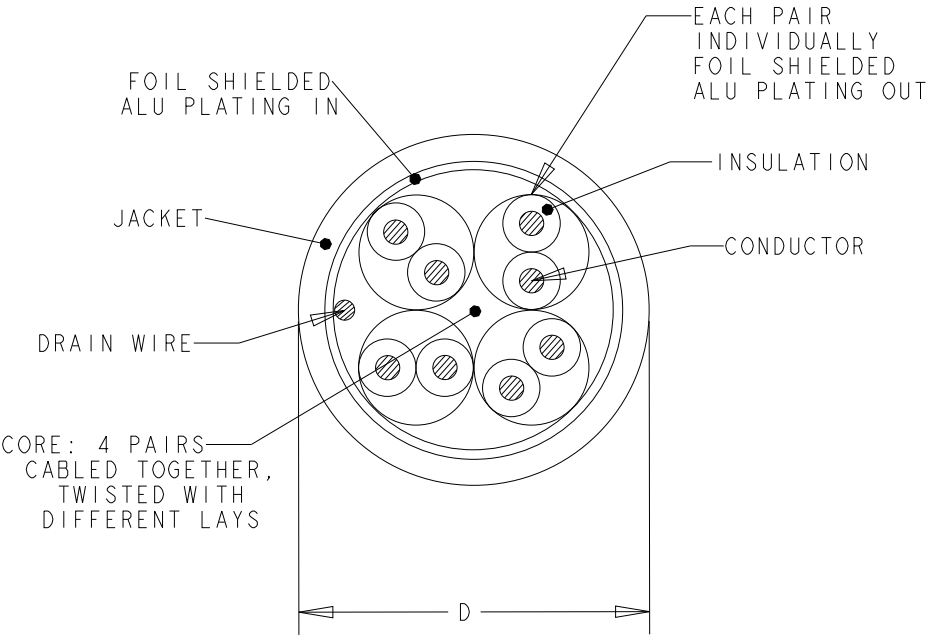

WHITE	1000	REEL	1711163-2
WHITE	500	REEL	1711163-1
COLOUR	LENGTH (METRES)	PACKAGE	PART NUMBER



THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL

-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±-

1 PLC ±-

2 PLC ±-

3 PLC ±-

4 PLC ±-

ANGLES ±-

FINISH -

DWN
L. de Dios
19Apr2013

CHK
M. Maqueda
19Apr2013

APVD
J. Sanabria
19Apr2013

PRODUCT SPEC
-

APPLICATION SPEC
-

WEIGHT
-

CUSTOMER DRAWING

TE Connectivity

NAME
CABLE, CAT7, F/FTP, PimF600
COMPACT, XG, SOLID,
PRO4, AWG23, LSZH

SIZE
A3

CAGE CODE
-

DRAWING NO
C-1711163

RESTRICTED TO
-

SCALE
NTS

SHEET
1

OF
1

REV
F